

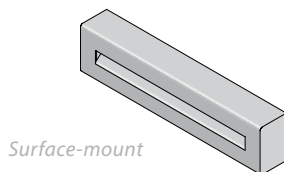


Modern and creative lighting for gardens, pathways, staircases, walls, buildings, patios, swimming pools, etc.



LED Down Light designs




LED Down Light
front view

- Entirely glare-free light output thanks to 45° louvres facing downward
- Quick and easy installation
- Unlimited application possibilities for indoor and outdoor lighting above or below water, 100% waterproof and IP68 tested
- Different lengths possible ranging from 200 mm to 1000 mm
- Extremely long lifespan (about 20 years at an average use of six hours per day), low power consumption and low heat generation
- All types of luminaires can be supplied individually, as a customised linear- or star-configured set with the cable length required. Nearly all **staub designlight** luminaires are combinable with one another




13 LED Down Light

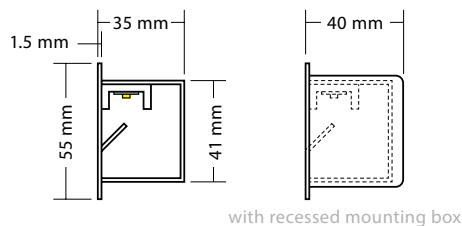


with recessed mounting box

LED Down Light, flush-mount, side view



LED Down Light, surface-mount, side view

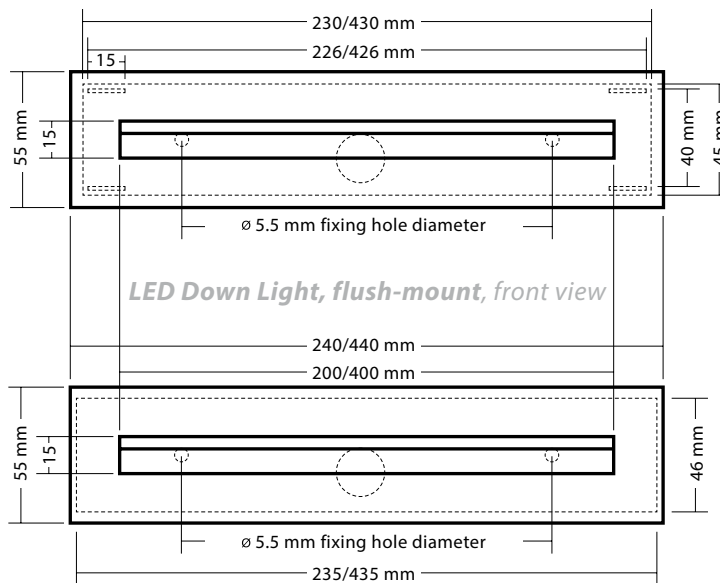

LED Down Light, flush-mount, front view

LED Down Light, surface-mount, front view

Standard design

Beautifully designed, brushed stainless steel housing with 45° louvre facing downward; flush-mount design; housing dimensions according to drawing; fitted with a total of 36 super-bright, warm white (3000 K, 200 lm per 200 mm) Linear LEDs of the latest generation; V2A stainless steel; without recessed mounting box; variably adjustable brightness via potentiometer in power supply unit

Power supply

40-watt or 120-watt power supply unit, 230 volt AC input, 12 volt DC output, IP67

Special design

Other housing lengths available upon request in 200 mm modules up to max. 1000 mm; surface-mount design for subsequent flat to the wall mounting; other LED designs: sdl super-bright warm white 2800 K (as for halogen, 190 lm per 200 mm) or cold white (5000 K, 224 lm per 200 mm); RGB multi-colour; integrated power supply unit (IP67) for direct 230 volt connection; V4A stainless steel; housing available in other colours upon request

Accessories (optional extras available, see pages 66–79)

Adhesive sealant for gluing the housing into walls, brickwork or steps; wireless remote control (see pages 62–65), mini motion detector, IR remote control for mini motion detector

LED Down Light	Item no.
LED Down Light 200, flush-mount, 12 volt DC, 3.6 watts, super-bright, warm white	20.150710
LED Down Light 400, flush mount, 12 volt DC, 7.2 watts, super-bright, warm white	20.150730
LED Down Light SA, special design according to customer specifications	20.150740
Recessed mounting box for LED Down Light 200, flush-mount	20.150800
Recessed mounting box for LED Down Light 400, flush-mount	20.150801
Recessed mounting box for LED Down Light SA, special design according to customer specifications	20.150802
Power supply unit 12 volt DC, 40 watts, adjustable, IP67, supplied with 2 m supply lead and euro plug	20.126060
Power supply unit 12 volt DC, 120 watts, adjustable, IP67, supplied with 2 m supply lead and euro plug	20.126130
Additional items as per price list	

